


PART NO.	COLOR CODE STRIPE	WIDTH "W"	"T" APPLICATION THICKNESS RANGE
MCGF-1N	WHITE	.13 (3.3)	.025-.045 (0.6-1.1)
MCGF-2N	PINK		.044-.056 (1.1-1.4)
MCGF-3N	YELLOW		.055-.069 (1.4-1.7)

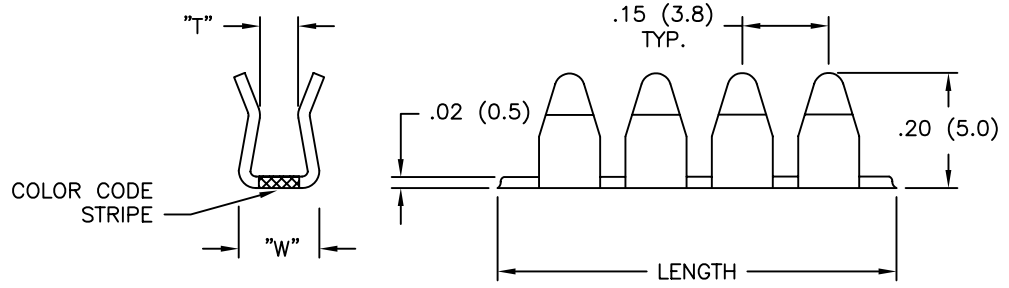

NOTES

1. LENGTH: 100 FT (30.5 M) REELS.
2. MATERIAL: 304 STAINLESS STEEL
COATING: NYLON, COLOR: BLACK.
3. TABER ABRASION RESISTANCE: 1KG LOAD, C17 WHEEL
5 TO 8 mg LOSS AFTER 100 CYCLES.
4. DIELECTRIC STRENGTH: 1000 VOLTS @ 60 HZ.
5. HEAT CONTINUOUS: 285°F (140°C)
6. OUT GASSING: TML .03 VCM 00
7. SALT SPRAY TESTING: PER ASTM B117. MIL-STD-202,
METHOD 301-2000 HOURS.
8. FLAMMABILITY: UL94-VO, YELLOW CARD NO. E113553 NZMT2.
9. RANDOM VIBRATION: MIL-STD-1344 METHOD 2005.1,
TEST CONDITIONS VI LETTER J.
DURATION 8 HOURS LONGITUDINAL AND 8 HOURS PERPENDICULAR.
rms G 41.7

B		SEE ECN #487 FOR CHANGES	SM 10.15.02	TITLE: METAL CONTINUOUS GROMMET, FLEXIBLE				⊕	▭	DWG IN IN (MM)	QR	
A		CORRECTED DRAWING TITLE	SM 08.13.02	TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE # MCGF	DWN: S.M.	APP:	FINAL				
REV		DESCRIPTION	ENGR DATE	MAT'L: SEE NOTES	RE: RICHCO, INC.	DT: 08.01.02	DT:	PART # MCGF SERIES		PRINT TYPE CA		
				RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060								