

Table of Models

	<p>Description: Peel-A-Way® (KSA) Material: Polyimide Film Index: -269°C to 400°C (-452°F to 752°F)</p>	
	<p>Description: Molded Snap Strips (RSA) Material: High Temp. Liquid Crystal Polymer (LCP) Index: -40°C to 260°C (-40°F to 500°F)</p>	
	<p>Description: Molded Solid Strips (RNA) Material: High Temp. Liquid Crystal Polymer (LCP) Index: -40°C to 260°C (-40°F to 500°F)</p>	

RSA replaces SA, RNA replaces NA and HNA.

Features:

- Available in three body types: Peel-A-Way® Removable Terminal Carriers, molded Solid Strips, and molded Snap Strips [breakable at .100/(2.54mm)].
- Board to board applications.
- Peel-A-Way® Removable Terminal Carrier can be easily removed to allow inspection of solder joints on both sides of PC board, or left in place for added stability.
- Custom designs available.

Specifications:

Terminals:

Brass - Copper Alloy
(C36000) ASTM-B-16


Plating:

G - Gold over Nickel
 M - Matte Tin over Nickel
 T - Tin/Lead over Nickel


Gold per MIL-G-45204
 Matte Tin per ASTM545-97
 Tin/Lead per MIL-P-81728
 Nickel per QQ-N-290

Dimensional Information


Molded Body Types

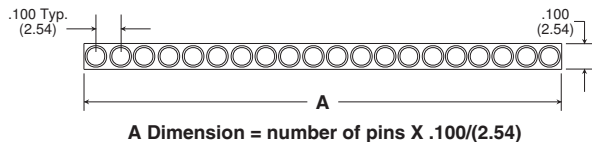

Peel-A-Way® Body Types

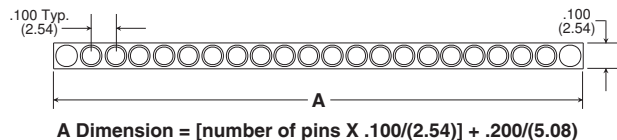

How To Order

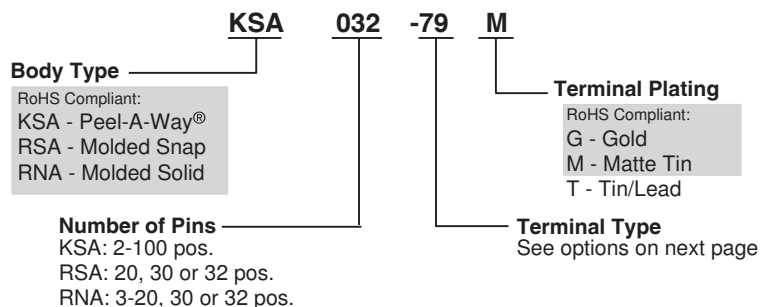

Note: Quick-Turn delivery is not available on products with Matte Tin plating.



5 Energy Way, West Warwick, RI 02893 USA
 Tel: 800.424.9850 | 401.823.5200
 Fax: 401.823.8723
 info@advanced.com | www.advanced.com
 Cat. 16 Rev. 2

Products shown covered by patents issued and/or pending. Specifications subject to change without notice.


inch/(mm)




Standard Quick-Turn Terminals

Additional standard and custom terminals available.
See Terminals section or consult factory.


<p>Type -79 Peel-A-Way® only</p>	<p>Type -80 Peel-A-Way® only</p>	<p>Type -81 Peel-A-Way® only</p>	<p>Type -574 Peel-A-Way® only (not Quick-Turn)</p>
<p>Type -08 Molded only</p>	<p>Type -09 Molded only</p>	<p>Type -68 Molded only</p>	<p>Type -43 Molded only</p>
<p>Type -185 Molded only</p>	<p>Type -42 Molded only</p>	<p>Type -71 Molded only</p>	

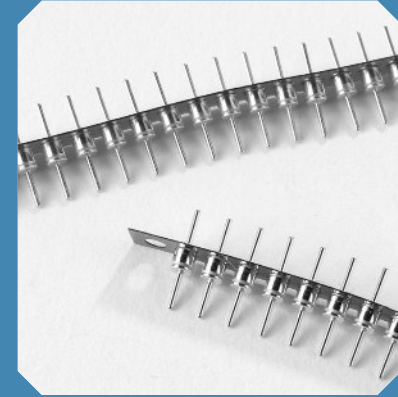

Surface Mount Applications:



Peel-A-Way®
Surface Mount Sockets



Surface Mount Top/Bottom

Features:

- Sockets surface mount to PCB.
- Supplied in high temperature Peel-A-Way® socket terminal carrier.
- Peel-A-Way® carrier can be left in place for added stability.
- High reliability screw-machined terminals with multiple finger beryllium copper contacts.
- Available with solder preforms.

Available Online:

- RoHS Qualification Test Report